



NUDURA STANDARD FORM UNIT


VERTICAL AND HORIZONTAL SEAMS MUST BE DETAILED WITH DYMONIC 100 FROM EDGE OF OPENING AND EXTEND BEYOND FLASHING MATERIALS BY 1" MINIMUM; VERTICAL SEAMS REQUIRE THE DYMONIC 100 TO GO BACK TO CONCRETE FACE AND FILL VERTICAL SEAM

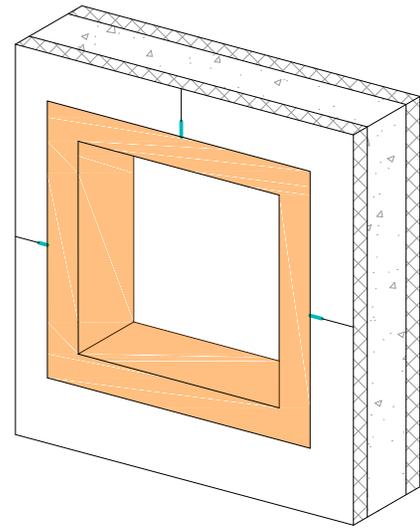

APPLY ENVIRO-DRI 3" MIN INTO ROUGH OPENING AND EXTERIOR FACE OF WALL AT SILL, JAMBS, HEAD

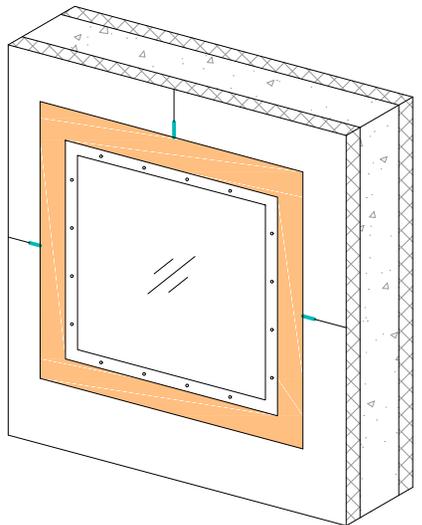

INSTALL NAIL FLANGE WINDOW, SET IN CONTINUOUS BEAD OF DYMONIC 100 EXCLUDING WINDOW SILLS

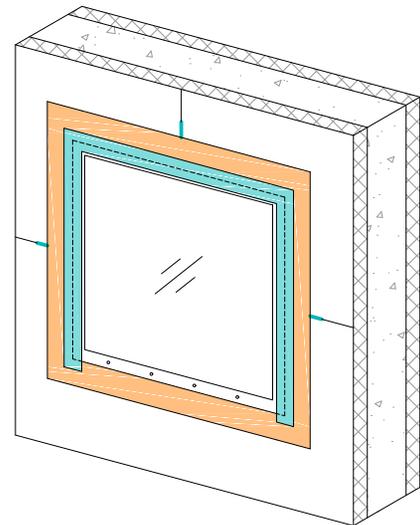

APPLY DYMONIC 100 OVER WINDOW FLANGE EXCLUDING WINDOW SILLS



| | | | | | |
|--|---------------|-------------------------|------------|-----------------|--|
| Project: | | File Name: | | | |
| Detail: Residential Rough Opening - Nail Flange Window - Enviro-Dri Option | | R-RO-NF-02 | | | |
| This detail is intended for conceptual purposes only. | Drawn by: KAB | Checked by: KS/RW/JS/CB | Scale: NTS | Date: 12/1/2020 | |