LICENSED PROFESSIONAL ENGINEER
S. J. ADEMA
OCTOBER 30, 2015
PROVINCE OF ONTARIO

COMMONWEALTH OF
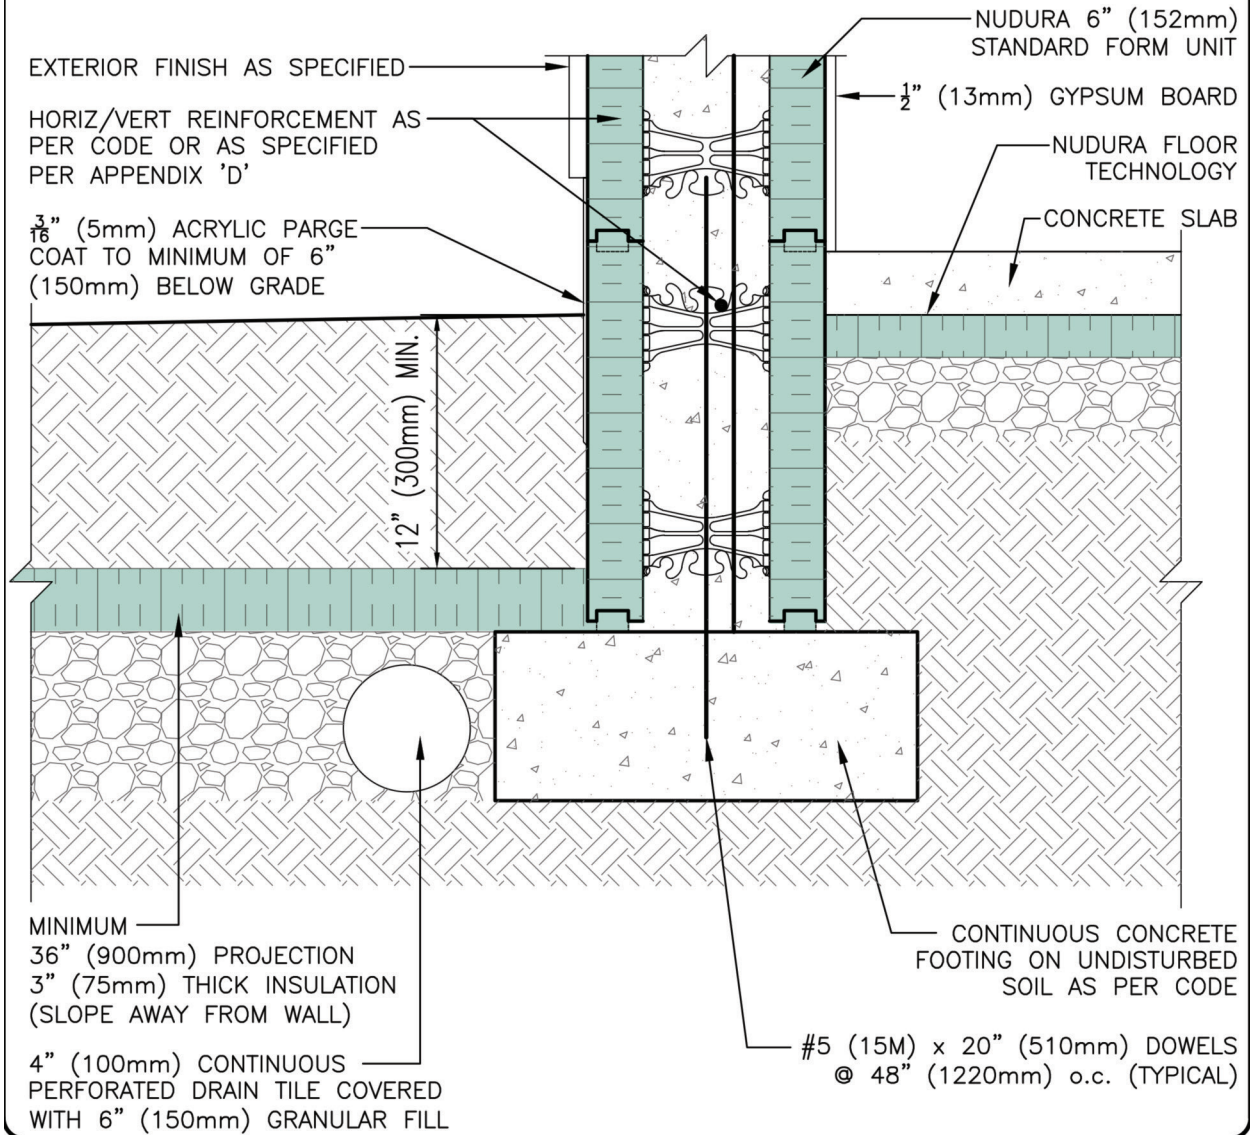REGISTERED
PROFESSIONAL
ANTHONY L. MOSCOLLIC
ENGINEER
PE-041361-E
PENNSYLVANIA

DISCLAIMER NOTICE:
SPECIFIC INFORMATION
REQUIRED FOR COMPLIANCE
WITH LOCAL CODES IS THE
RESPONSIBILITY OF THE
DESIGNER

EXTERIOR FINISH AS SPECIFIED

HORIZ/VERT REINFORCEMENT AS PER CODE OR AS SPECIFIED PER APPENDIX 'D'

$\frac{3}{16}$" (5mm) ACRYLIC PARGE COAT TO MINIMUM OF 6" (150mm) BELOW GRADE

12" (300mm) MIN.

MINIMUM
36" (900mm) PROJECTION
3" (75mm) THICK INSULATION
(SLOPE AWAY FROM WALL)

4" (100mm) CONTINUOUS PERFORATED DRAIN TILE COVERED WITH 6" (150mm) GRANULAR FILL

NUDURA 6" (152mm) STANDARD FORM UNIT

$\frac{1}{2}$" (13mm) GYPSUM BOARD

NUDURA FLOOR TECHNOLOGY

CONCRETE SLAB

CONTINUOUS CONCRETE FOOTING ON UNDISTURBED SOIL AS PER CODE

#5 (15M) x 20" (510mm) DOWELS @ 48" (1220mm) o.c. (TYPICAL)

NUDURA®
INTEGRATED BUILDING TECHNOLOGY
Building Value

NUDURA 6" (152mm) FORM UNIT AT SHALLOW INSULATED FOOTING EXTERIOR FINISH AS SPECIFIED

REV. NO. 005 KS	DWG NO.
REV. DATE: SEPT 2015	C-12
DRAWN BY J.N / N.L	SCALE: "Not to Scale"